




**Decoland** Edges

Aluminium L-Egde



# Decoland Aluminium L-Edge

Flexible, strong, elegant and versatile highest quality aluminium (99.4% pure alloy) edging is available in a L-shape design, light in weight and easy to install.

The triangle cut-outs are made to create a fully flexible edge for curves and bends by cutting the strip or by leaving them uncut to have a straight and solid edge.

Aluminium L-Edge is suitable for neat and elegant edging for walkways, lawns, flowerbeds, hard landscaping, parking lots, ...

Fixation of Aluminium L-Edge is possible by using Galvanized Steel Anchors. Interlocking Snap-On Connectors made of Polyamide are available to extend individual sections.

## Technical Specifications\*

### GENERAL


Material	: Aluminium alloy 1050 (99.4% Pure)
Design mold	: 2126R
Color	: Aluminium natural grey
Fixation anchors	: 5 mm Galvanized steel
Connectors	: Pure Polyamide with UV treatment (recyclable, eco-friendly)

PHYSICAL DATA	Size # 1	Size # 2	Size # 3
Dim. per profile ( W x H )	: 5 cm x 5 cm	5 cm x 10 cm	8 cm x 10 cm
Thickness	: 2 mm	2 mm	2 mm
Dimension Tolerance	: +/- 5 %	+/- 5 %	+/- 5 %
Rod length	: 200 / 250 cm	200 / 250 cm	200 / 250 cm

\* In favor of product improvements, specifications may change without prior notice.

\* Dimensions and thickness can be made in different specification than above standards according to customer requirements.

## Installation Instructions

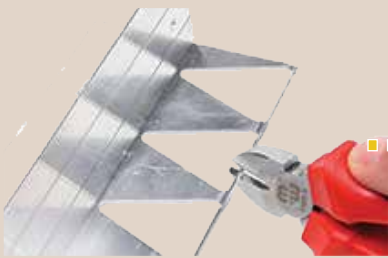

Cut the triangle strip to enable the edging to be applied in curvy landscaping design or the creation of bends and corners.



Extend individual L-Edges using the connector by insertion into the holes provided for. After final positioning of the edges, use the galvanized steel anchors to fix the position of the edges, install 2 anchors for every 100 cm.



Now you are ready to complete the design with the desired material, (gravel fix, grass, plants, .....)

\* Instructions for installation are guidance only and subject to local rules and regulations

\* In case of fixing in concrete it should be fixed by fishers & screws (optional provided by client).

### Contact:

Decoland Tec. Landscape  
T: +20 11 1199 5970  
+20 2 2573 8660

E: [info@decoland-eg.com](mailto:info@decoland-eg.com)  
W: [www.decoland-egy.com](http://www.decoland-egy.com)  
Fb: Decoland tec. Landscape  
in: [decoland-tec-landscape/](http://decoland-tec-landscape/)

Office: Plot 238, Small Industries Area,  
North Katameya-Ain Sokhna Road  
3rd Settlement, New Cairo, Egypt  
Factory: Plot 9 & 14, New Industrial Zone,  
Faiyum - Egypt