




**Decoland** Gravel Stabilization

Gravel Fix Step



# Gravel Fix Step

A very simple way to create your individual section of stabilized gravel. They come in handy 40 x 80 cm kits complete with gravel stabilization, geotextile fitted, border frame fitted. Just sand and gravel are required and off you go. Fully draining and stable. No more wet feet!

Gravel comes in many attractive colors and sizes, pebbles or aggregate. All can be used as long as the gravel size is between 3 and 16 mm! Let your creativity guide you in the layout of your own garden and beyond. The Gravel Fix Step sections ensure dry feet as the porous gravel stabilization system allows rainwater to drain immediately. No algae found on traditional stepping stones or tiles. Seedlings cannot sprout due to the anti-weed geotextile base. Use aggregate for maximum non-slip effect.

## Environmental and Engineering Excellence

Gravel Fix Step is manufactured in Egypt under stringent quality and environmental Control standards.

The use of pure raw materials (100% recyclable) and well developed infrastructure to minimize our delivery carbon footprint, underline our corporate vision in providing environmentally sustainable solutions.

## Gravel Fix Step, a sustainable product:

- Manufactured in Egypt using latest technology,
- Fully recyclable after end of life-cycle,
- UV resistant,
- No glue, only thermally welded connections.



For maximum mobility and stability on path and walkways



Frame included

## Where to create your Gravel “Stepping Stones”

- In your lawn or borders, ensuring you remain dry and clean whilst gardening,
- Along the outside perimeter of your house, no more dirty outer walls,
- For the walkway to your shed or storage space as ‘steps’ or as a continuous path,
- Creating a terrace on which furniture can be placed,
- Under the water tap outside the house,
- Around the grave at the cemetery for easy access and maintenance,
- In mosaic or chess board arrangement with grass or stone.

## Installation Instructions

- Remove 10 cm of soil or grass of the desired 40 x 80 cm area.
- Fill the void with 5 cm of sand and compact it. Lay the Gravel Fix Step.
- Fill the secured step with approx 25 kg of gravel (any size between 3 – 16 mm). Ensure that the gravel is spread evenly, across and covering the entire step.

## Technical Specifications\*

### GENERAL


Material	: 100% Recycled or pure Polypropylene (recyclable)
Cell Structure	: Hexagonal
Color	: Dark Grey / Black (Other colors available upon request).
Membrane	: Geo-textile 68 g/m <sup>2</sup>
UV and frost	: UV resistant

### PHYSICAL DATA

Dimension (L x W x H)	: 400 x 790 x 45 mm (0.3 m <sup>2</sup> )
Sand Required for 5 cm:	25 KG
Gravel Required	: 25 KG

\* In favor of product improvements, specifications may change without prior notice.

\* Gravel Fix Step is frequently used on light slopes. Specific requirements on the application depend on the circumstances on site. Please contact the manufacturer for further advise.

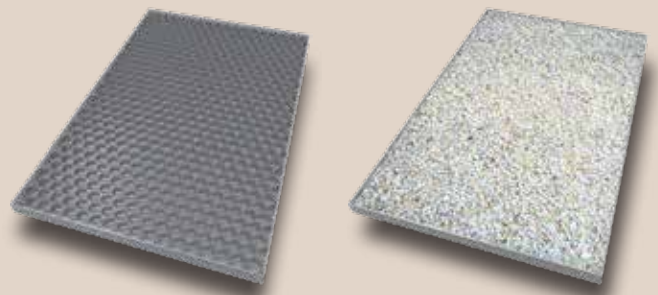

Contact:

Decoland Tec. Landscape  
T: +20 11 1199 5970  
+20 2 2573 8660

E: [info@decoland-eg.com](mailto:info@decoland-eg.com)  
W: [www.decoland-egy.com](http://www.decoland-egy.com)  
Fb: Decoland tec. Landscape  
in: [decoland-tec-landscape/](http://decoland-tec-landscape/)

Office: Plot 238, Small Industries Area,  
North Katameya-Ain Sokhna Road  
3rd Settlement, New Cairo, Egypt  
Factory: Plot 9 & 14, New Industrial Zone,  
Faiyum - Egypt