

**Decoland** Flex Edge

Edging Systems



Scan for more info



# Decoland Flex Edge

Flex Edge is used to create clean and easily maintainable borders between landscape areas. This specially engineered aluminium profile combines plasticity with exceptional sturdiness, making it ideal for pavement applications using water-bound materials, gravel, rock, flagstone or asphalt. It is also ideally suited for green roofing applications and for planting bed borders and lawn edging.

The Flex pavement and bed edging system ensures rapid, low-waste and free form installation without the need for special tools. Despite being so lightweight, this product is extremely durable and will not rot, collapse or rust like wood, plastic or steel. Gently rounded edges provide for added safety during installation and later maintenance. The special profile on this product guarantees not only high durability, it also allows for the sections to be connected to one another without screws or rivets. The wide range of available accessories allows for nearly limitless landscaping creativity.

## Technical Specifications\*

General	Size 1	Size 2
Material :	Alloy aluminium 6063	Alloy aluminium 6063
Surface :	Natural finish aluminium	Natural finish aluminium
Height :	100 mm (+/-5%)	150 mm (+/-5%)
Dimensions :	Thickness: top/bottom 5 mm - cross section 1.8 mm (+/-5%)	
Available lengths:	2,500 mm flexible for light curves (for other lengths connect manufacturer for availability).	

## Installation

Soil clamp :	Natural silver-grey color Lengths: 330 mm	Natural silver-grey color Lengths: 330 mm
Connector :	Natural silver-grey color H/W = 90/100 mm	Natural silver-grey color H/W = 143/100 mm

\* In favor of product improvements, specifications may change without prior notice.

## Applications

- Path limitations,
- Lawn edges,
- Flowerbed enclosures,
- Roof gardens.

## Advantages

- Resistant to mechanical stresses and weather exposure,
- Flexible sections that readily form curves, radii and corners,
- Simple, quick installation,
- Easy to shorten, no re-zincing after cutting,
- Reduced lateral drainage saves bed irrigation water,
- Reduced root undergrowth and vegetation overgrowth facilitates edge maintenance,
- Corrosion resistant, recyclable aluminium alloy.


## Equipment

### Joint connector:

Shock connector is recommended to achieve an uninterrupted visible surface (without any gaps) or straight view from the top. The connector ends about 8 mm below the top edge of the straight profile and is almost invisible after installation. Shock connectors are not necessarily required, as the profile ends can also be connected by inserting them into each other.

### Soil clamps:

Pegs provide additional lateral support for the profile, and if they are set in concrete, they can prevent theft in public spaces.

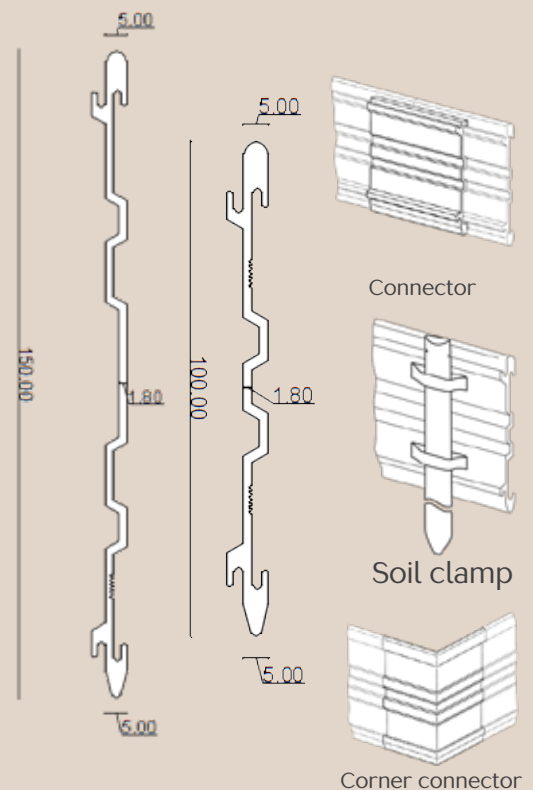

Contact:

Decoland Tec. Landscape  
T: +20 11 1199 5970  
+20 2 2573 8660

E: info@decoland-eg.com  
W: www.decoland-egy.com  
Fb: Decoland tec. Landscape  
in: decoland-tec-landscape/

Office: Plot 238, Small Industries Area,  
North Katameya Ain Sokhna Road,  
3rd Settlement, New Cairo, Egypt.  
Factory: Plot 9 & 14, New Industrial Zone,  
Fayoum, Egypt.